

Pressure gauge push-button stop cock



Application

Shut-off element between measuring line and pressure gauge. Normally, the push-button stop cock is closed. In this state, there is no pressure applied to the pressure gauge. Push the button to apply pressure to the pressure gauge and to display the operating pressure. Suitable for gases as per DVGW G260 and SVGW.

Technical specifications

Operating temperature range

Medium: 0/70 °C

Ambient: -20/+60 °C

Connection

Female x female

Rp 1/4 EN 10226

Rp 1/2 EN 10226

1/4-18 NPT

1/2-14 NPT

Nominal pressure

5 bar (MOP 5)

Housing

Brass, nickel-plated


Test

DVGW- and SVGW-
tested, with EC Type
Examination Certificate


Product ID: CE-0085AQ0985

Technical drawings

Rp $\frac{1}{4}$ / $\frac{1}{4}$ -18 NPT

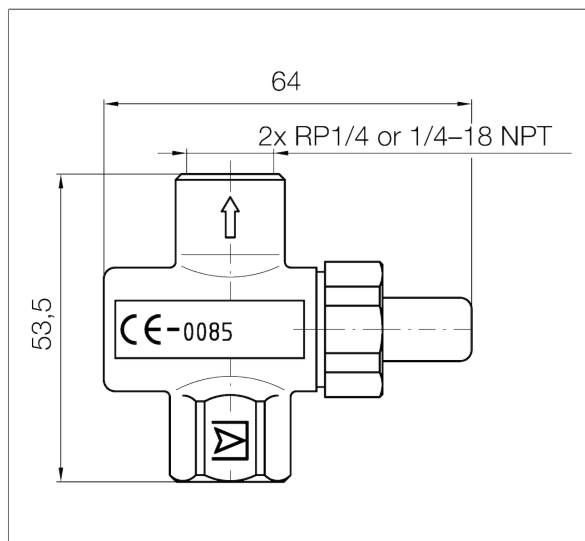


Rp $\frac{1}{2}$ / $\frac{1}{2}$ -14 NPT

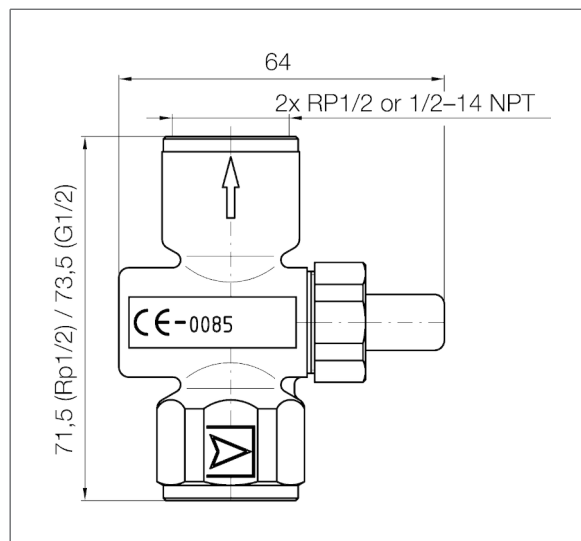

Versions

Pressure gauge push-button stop cock female x female

	Connection	Nominal pressure	Material	Test	Part no.
	Rp $\frac{1}{4}$ EN 10226	MOP 5	Brass, nickel-plated	DVGW- and SVGW-tested	63191
	Rp $\frac{1}{2}$ EN 10226	MOP 5	Brass, nickel-plated	DVGW- and SVGW-tested	63031
	$\frac{1}{4}$ -18 NPT	MOP 5	Brass, nickel-plated	-	63193
	$\frac{1}{2}$ -14 NPT	MOP 5	Brass, nickel-plated	-	63235

Blue part no. = in-stock items