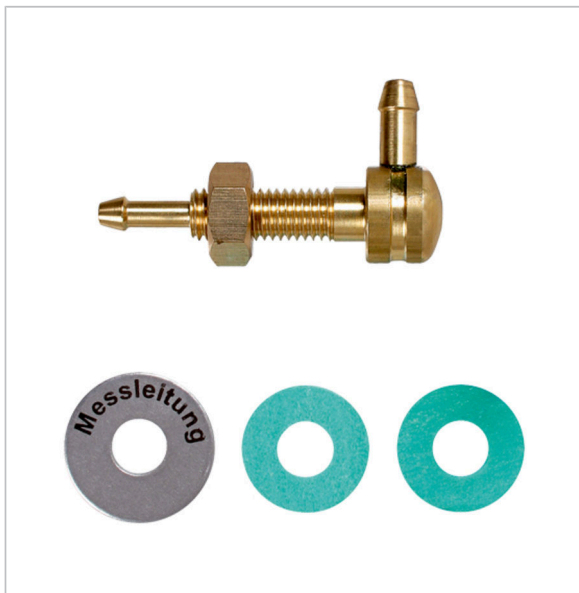


Mounting accessories for inner linings









Benefits

- Extensive range of accessories for AFRISO leak protection linings/inner linings
- High-quality components for easy, fast mounting
- Plastic parts made of high-strength, robust plastic

Application










Suitable for AFRISO inner linings AK-S, AF-S and AR-S for mounting.

Versions

	Part no.
 Angled nipple short 6 x 4/6 mm	43906
 Angled nipple short with spacer 6 x 4/6 mm	43904
 Angled nipple Long 6 x 4/6 mm	43908
 Condensate bar	43692
 Liquid barrier	43646
 Suction line Perforated 6 x 3 mm, roll 100 m	43910


Blue part no. = in-stock items



	Part no.
	43911
Fastening ring ø 500 mm round gasket, foam rubber and cardboard gasket	43900A
	43900B
Fastening ring ø 600 mm round gasket, foam rubber and cardboard gasket	43900C
Fastening ring ø 620 mm round gasket, foam rubber and cardboard gasket	43900D
	43945
Hose connector GS6 6 x 6 mm, for suction hose	43912
	43944
T piece TS6 6 x 6 x 6 mm, for suction hose	43913
	43914
	43918
PVC hose transparent 4 x 2 mm, roll 100 m	43650
PVC hose Green 4 x 2 mm, roll 100 m	43649
PVC hose Red 4 x 2 mm, roll 100 m	43648
	43664
PVC hose Green 6 x 2 mm, roll 100 m	43663
PVC hose Red 6 x 2 mm, roll 100 m	43662
	43919
Glue Epple 4851 can (0.9 kg)	43920
	20466
Fastening ring ø 500 mm V2A flat steel (without seal), 40 x 8 mm, glass bead blasted	43900N
Fastening ring ø 600 mm V2A flat steel (without seal), 40 x 8 mm, glass bead blasted	43900O

Blue part no. = in-stock items



	Part no.	
	Flange KT G2	44007
	Flange KT NW65	44006
	Foam rubber 50 x 5 mm roll 10 m	43926
	Foam rubber 50 x 8 mm roll 10 m	43942
	Mipoplast bottom plate 800 x 800 mm	43928
	Fleece plate LSV2 1 x 2 m, without magnets	43952

Blue part no. = in-stock items

Description

Condensate bar with three condensate traps for visual inspection, with integrated bracket for easy wall mounting. If there is no steady gradient in the measuring, exhaust and suction lines from the leak detector to the tank, a condensate bar must be mounted at each lowest point of the lines. When condensate forms, the liquid is collected in the relevant condensate trap. The condensate traps can be easily unscrewed for emptying.

Tightness-tested

Compact, robust design made of high-strength plastic

Compatible with hoses with 4/6 mm